


LUMINAIRE PHOTOMETRIC TEST REPORT

Report number:


| | | |
|---------------------------------------|--------------------------|-------------|
| MANUFACTURER: ILUMEN GMBH | Address: | |
| NAME: Muller | TYPE: IL-ST11-D20040-TY3 | WEIGHT: |
| SPECIFICATION: 5050LED 4000K Type III | DIMENSION: | SERIAL No.: |

| | | | | | |
|-------------------|---------|--------------------|---------|-------------------|-------|
| DATA OF LAMP | | Imax(cd) | 10505 | S/MH (C0/180) | 1.79 |
| MODEL | | EFFICIENCY (%) | 100.0 | S/MH (C90/270) | 1.71 |
| NOMINAL POWER(W) | 200 | TOTAL FLUX(lm) | 29967 | Voltage(V) | 230.3 |
| RATED VOLTAGE (V) | 230 | EFFICIENCY (lm/W) | 149.5 | Current(A) | 0.873 |
| NOMINAL FLUX(lm) | 29967.0 | η up (%) | 0.7 | Power(W) | 200.3 |
| LAMPS QUANTITY | 1 | η down (%) | 99.3 | Power Factor (PF) | 0.996 |
| TEST VOLTAGE (V) | 230.3 | Effective Flux(lm) | 29966.9 | EEI | 0.100 |

LUMINOUS INTENSITY DISTRIBUTION

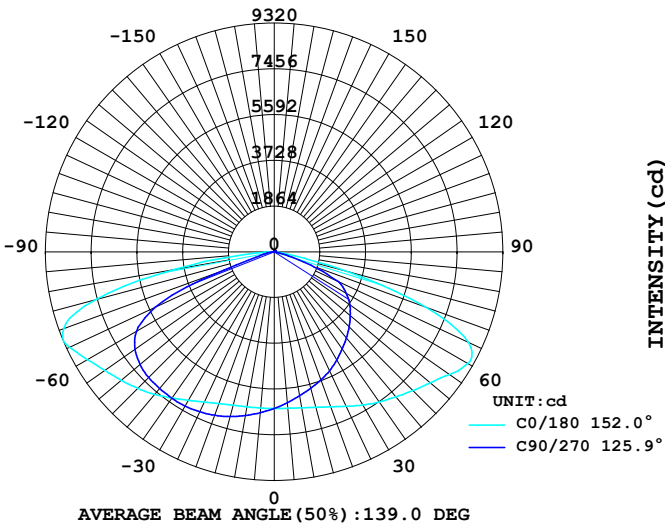

LUMINOUS INTENSITY DISTRIBUTION

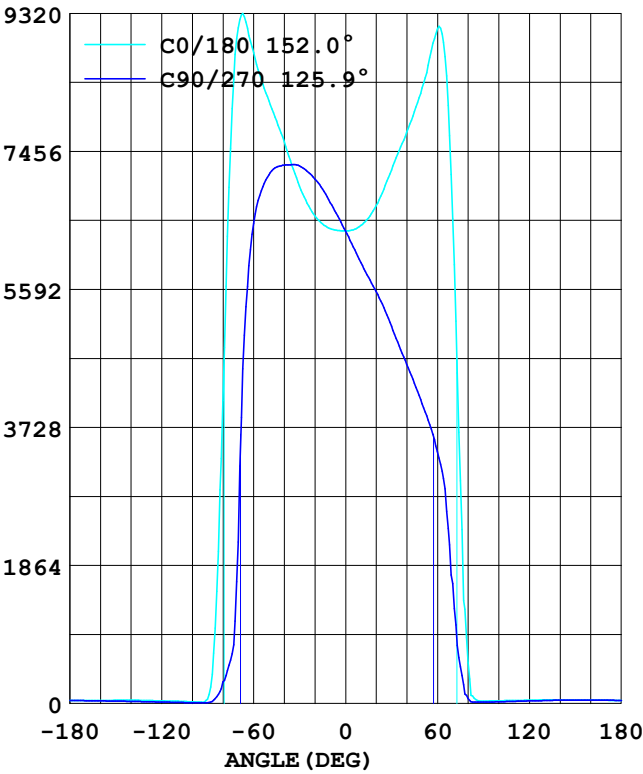


Test System:
 Temperature: 25.3 DEG
 Operators:
 Test Date: 2025.03.23

Test Set: 5.0 deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 10.000 m
 Remarks:

AVERAGE AND CENTER E Figure

Report number:

| | | |
|--------------------------------------|-------------------------|-------------|
| MANUFACTURER: ILUMEN GMBH | Address: | |
| NAME: Muller | TYPE:IL-ST11-D20040-TY3 | WEIGHT: |
| SPECIFICATION:5050LED 4000K Type III | DIMENSION: | SERIAL No.: |

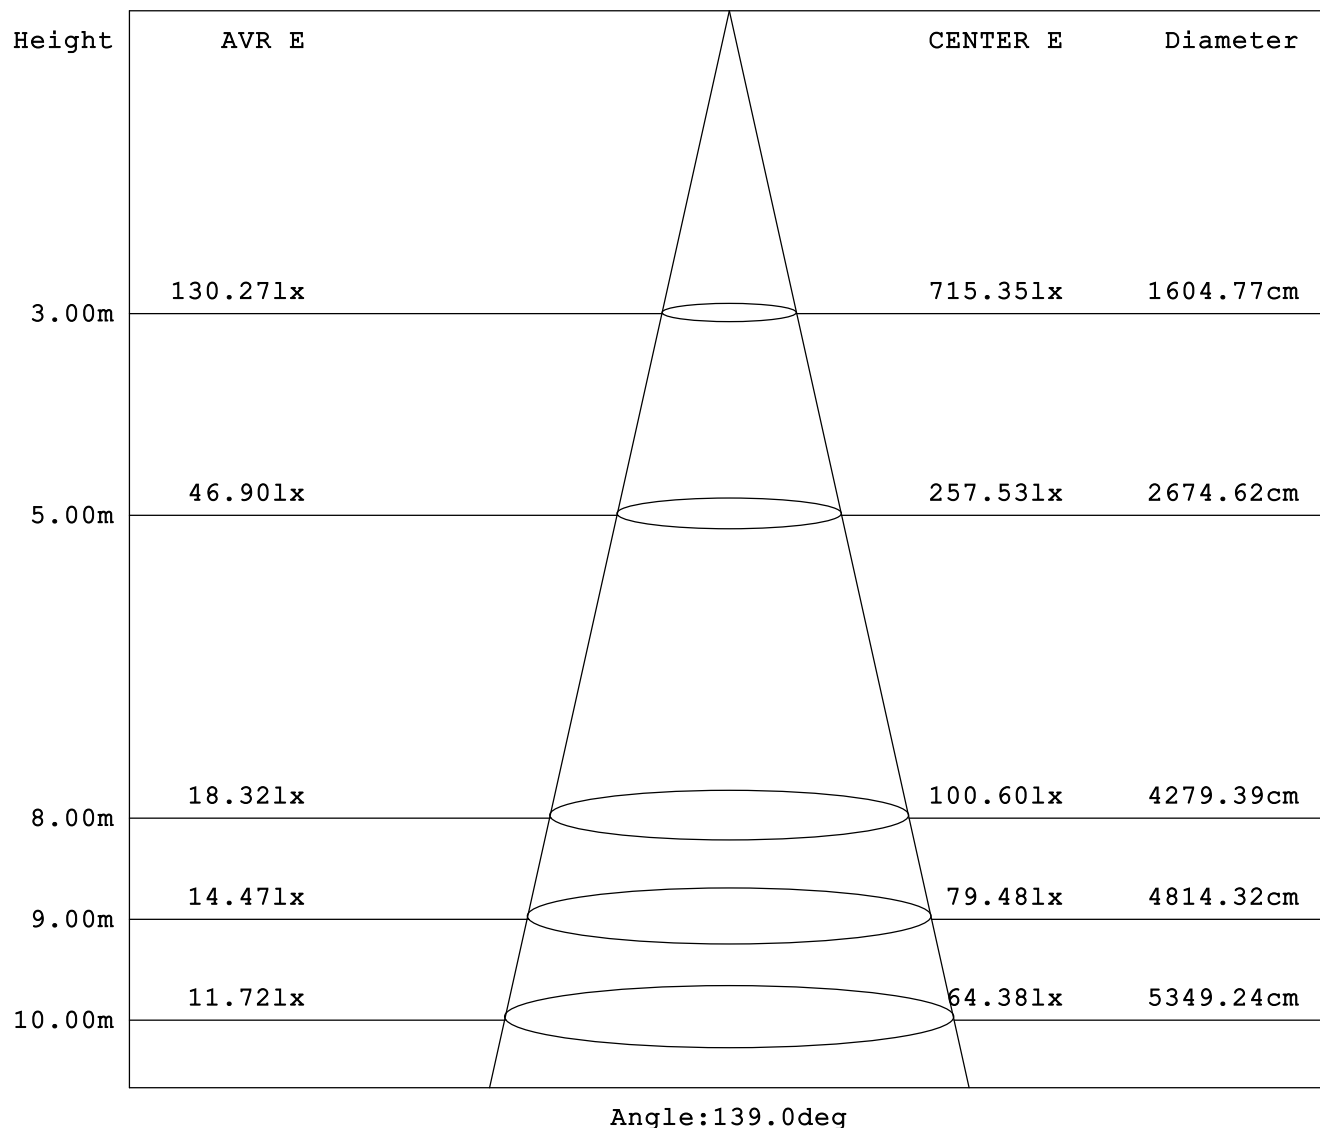

Test System:
 Temperature:25.3DEG
 Operators:
 Test Date:2025.03.23

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:10.000 m
 Remarks:

ZONAL FLUX DIAGRAM

Report number:

| | | |
|--------------------------------------|-------------------------|-------------|
| MANUFACTURER: ILUMEN GMBH | Address: | |
| NAME: Muller | TYPE:IL-ST11-D20040-TY3 | WEIGHT: |
| SPECIFICATION:5050LED 4000K Type III | DIMENSION: | SERIAL No.: |

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | γ | Zone | total |
|-------|--------------------------|-------|-------|-------|-------|-------|-------|-------|---------|---------|-------|
| 5.0 | 638.6 | 652.8 | 657.9 | 652.4 | 639.6 | 623.4 | 616.6 | 623.8 | 0- 5 | 152.5 | 152.5 |
| 10.0 | 641.3 | 668.0 | 676.5 | 666.6 | 645.4 | 608.8 | 595.4 | 609.2 | 5- 10 | 456.7 | 609.3 |
| 15.0 | 647.5 | 684.5 | 694.8 | 682.6 | 655.6 | 595.0 | 575.4 | 594.9 | 10- 15 | 759.2 | 1369 |
| 20.0 | 658.4 | 704.2 | 708.4 | 700.5 | 672.4 | 580.2 | 555.9 | 580.1 | 15- 20 | 1060 | 2429 |
| 25.0 | 675.3 | 726.0 | 718.7 | 720.2 | 694.6 | 565.3 | 534.6 | 564.6 | 20- 25 | 1358 | 3786 |
| 30.0 | 698.6 | 750.8 | 725.8 | 741.7 | 720.2 | 550.7 | 509.5 | 550.4 | 25- 30 | 1652 | 5438 |
| 35.0 | 727.0 | 777.1 | 727.5 | 763.4 | 746.8 | 533.9 | 482.8 | 534.3 | 30- 35 | 1939 | 7377 |
| 40.0 | 758.5 | 799.9 | 726.9 | 781.2 | 771.4 | 515.1 | 457.8 | 517.3 | 35- 40 | 2211 | 9588 |
| 45.0 | 786.6 | 817.6 | 724.0 | 794.8 | 798.9 | 493.4 | 432.5 | 497.3 | 40- 45 | 2465 | 12053 |
| 50.0 | 813.7 | 831.4 | 713.9 | 804.9 | 831.1 | 466.3 | 404.6 | 472.3 | 45- 50 | 2692 | 14745 |
| 55.0 | 842.8 | 841.8 | 692.3 | 808.6 | 872.1 | 432.0 | 376.6 | 439.9 | 50- 55 | 2884 | 17629 |
| 60.0 | 879.0 | 844.0 | 648.1 | 800.1 | 910.5 | 393.2 | 340.0 | 402.6 | 55- 60 | 3030 | 20659 |
| 65.0 | 920.0 | 830.5 | 535.6 | 756.8 | 873.4 | 337.4 | 289.7 | 352.7 | 60- 65 | 3089 | 23748 |
| 70.0 | 912.4 | 768.9 | 218.1 | 575.3 | 654.1 | 219.7 | 161.8 | 259.8 | 65- 70 | 2849 | 26597 |
| 75.0 | 750.0 | 435.8 | 58.55 | 130.6 | 300.8 | 83.95 | 49.62 | 118.9 | 70- 75 | 1947 | 28544 |
| 80.0 | 409.3 | 78.76 | 29.27 | 37.39 | 55.11 | 15.75 | 6.676 | 35.31 | 75- 80 | 910.3 | 29455 |
| 85.0 | 101.8 | 21.63 | 6.541 | 12.38 | 5.499 | 3.109 | 1.966 | 5.213 | 80- 85 | 262.7 | 29718 |
| 90.0 | 6.031 | 4.556 | 1.281 | 2.998 | 3.348 | 1.661 | 1.899 | 1.499 | 85- 90 | 45.36 | 29763 |
| 95.0 | 1.862 | 2.390 | 0.955 | 2.203 | 3.503 | 2.087 | 2.068 | 1.935 | 90- 95 | 12.69 | 29776 |
| 100.0 | 2.317 | 2.256 | 1.056 | 2.136 | 3.736 | 2.502 | 2.326 | 2.405 | 95-100 | 12.09 | 29788 |
| 105.0 | 2.738 | 2.323 | 1.292 | 2.214 | 3.946 | 2.839 | 2.652 | 2.796 | 100-105 | 13.15 | 29801 |
| 110.0 | 3.082 | 2.469 | 1.528 | 2.349 | 4.113 | 3.142 | 2.955 | 3.132 | 105-110 | 14.14 | 29815 |
| 115.0 | 3.348 | 2.626 | 1.753 | 2.494 | 4.268 | 3.400 | 3.248 | 3.445 | 110-115 | 14.88 | 29830 |
| 120.0 | 3.592 | 2.805 | 1.966 | 2.640 | 4.468 | 3.647 | 3.506 | 3.713 | 115-120 | 15.35 | 29845 |
| 125.0 | 3.847 | 2.996 | 2.191 | 2.830 | 4.689 | 3.917 | 3.742 | 3.960 | 120-125 | 15.62 | 29861 |
| 130.0 | 4.124 | 3.210 | 2.438 | 3.020 | 4.811 | 4.208 | 3.989 | 4.206 | 125-130 | 15.71 | 29877 |
| 135.0 | 4.346 | 3.412 | 2.686 | 3.210 | 4.789 | 4.410 | 4.270 | 4.429 | 130-135 | 15.48 | 29892 |
| 140.0 | 4.445 | 3.569 | 2.910 | 3.367 | 4.689 | 4.455 | 4.484 | 4.508 | 135-140 | 14.75 | 29907 |
| 145.0 | 4.412 | 3.681 | 3.090 | 3.479 | 4.567 | 4.422 | 4.574 | 4.474 | 140-145 | 13.53 | 29920 |
| 150.0 | 4.335 | 3.771 | 3.259 | 3.579 | 4.468 | 4.377 | 4.574 | 4.407 | 145-150 | 12.01 | 29932 |
| 155.0 | 4.268 | 3.849 | 3.405 | 3.680 | 4.390 | 4.321 | 4.563 | 4.351 | 150-155 | 10.35 | 29943 |
| 160.0 | 4.235 | 3.928 | 3.562 | 3.769 | 4.357 | 4.287 | 4.551 | 4.295 | 155-160 | 8.605 | 29951 |
| 165.0 | 4.224 | 4.006 | 3.720 | 3.859 | 4.335 | 4.253 | 4.506 | 4.250 | 160-165 | 6.790 | 29958 |
| 170.0 | 4.246 | 4.085 | 3.866 | 3.971 | 4.323 | 4.220 | 4.450 | 4.195 | 165-170 | 4.909 | 29963 |
| 175.0 | 4.246 | 4.152 | 4.012 | 4.049 | 4.312 | 4.164 | 4.338 | 4.116 | 170-175 | 2.969 | 29966 |
| 180.0 | 4.290 | 4.197 | 4.169 | 4.127 | 4.290 | 4.130 | 4.214 | 4.049 | 175-180 | 0.991 | 29967 |
| DEG | LUMINOUS INTENSITY:×10cd | | | | | | | | | UNIT:lm | |

Test System:
Temperature:25.3DEG
Operators:
Test Date:2025.03.23


Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:10.000 m
Remarks:

ISOCANDELA DIAGRAM

Report number:

| | | |
|---------------------------------------|--------------------------|-------------|
| MANUFACTURER: ILUMEN GMBH | Address: | |
| NAME: Muller | TYPE: IL-ST11-D20040-TY3 | WEIGHT: |
| SPECIFICATION: 5050LED 4000K Type III | DIMENSION: | SERIAL No.: |

UNIT: cd

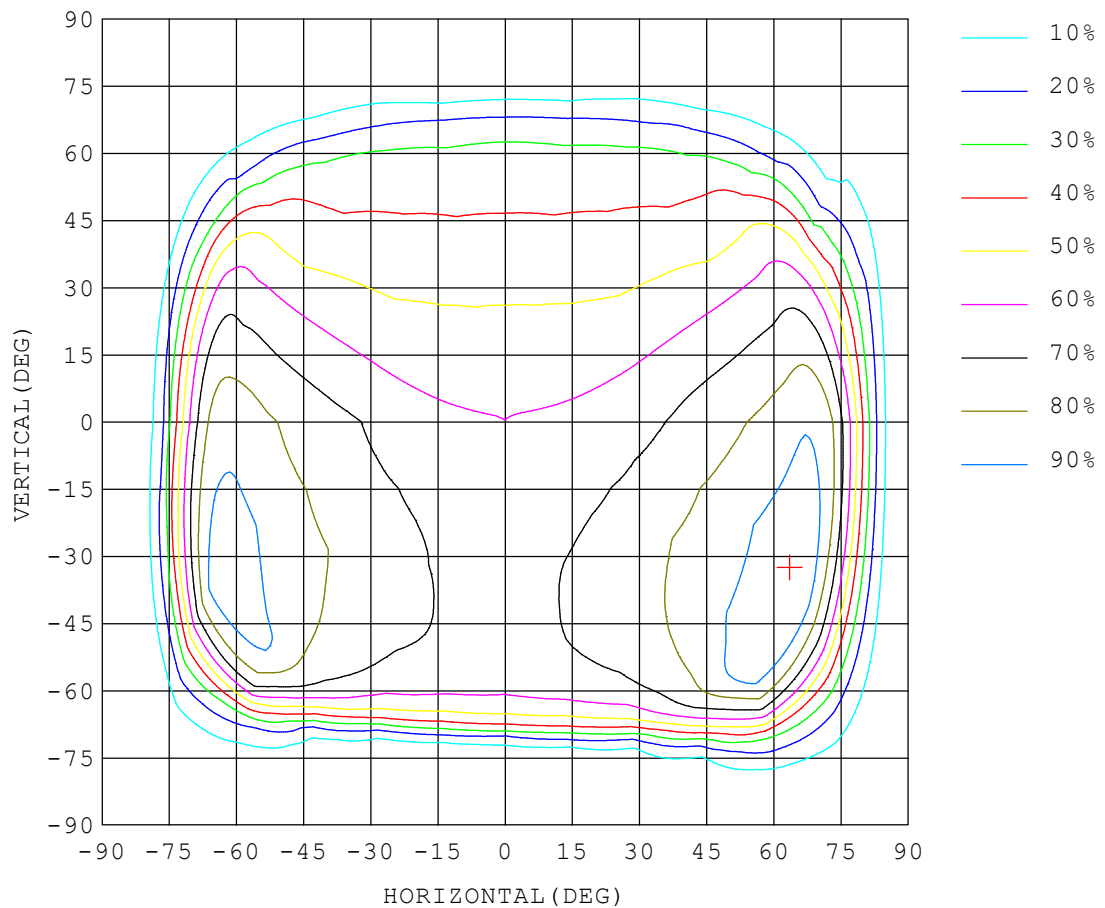


Test System:
Temperature: 25.3 DEG
Operators:
Test Date: 2025.03.23

Test Set: 5.0 deg/s C-Gamma (TYPE C)
Humidity: 65.0%
Test Distance: 10.000 m
Remarks:

ISOLUX DIAGRAM

Report number:

| | | |
|--------------------------------------|-------------------------|-------------|
| MANUFACTURER: ILUMEN GMBH | Address: | |
| NAME: Muller | TYPE:IL-ST11-D20040-TY3 | WEIGHT: |
| SPECIFICATION:5050LED 4000K Type III | DIMENSION: | SERIAL No.: |

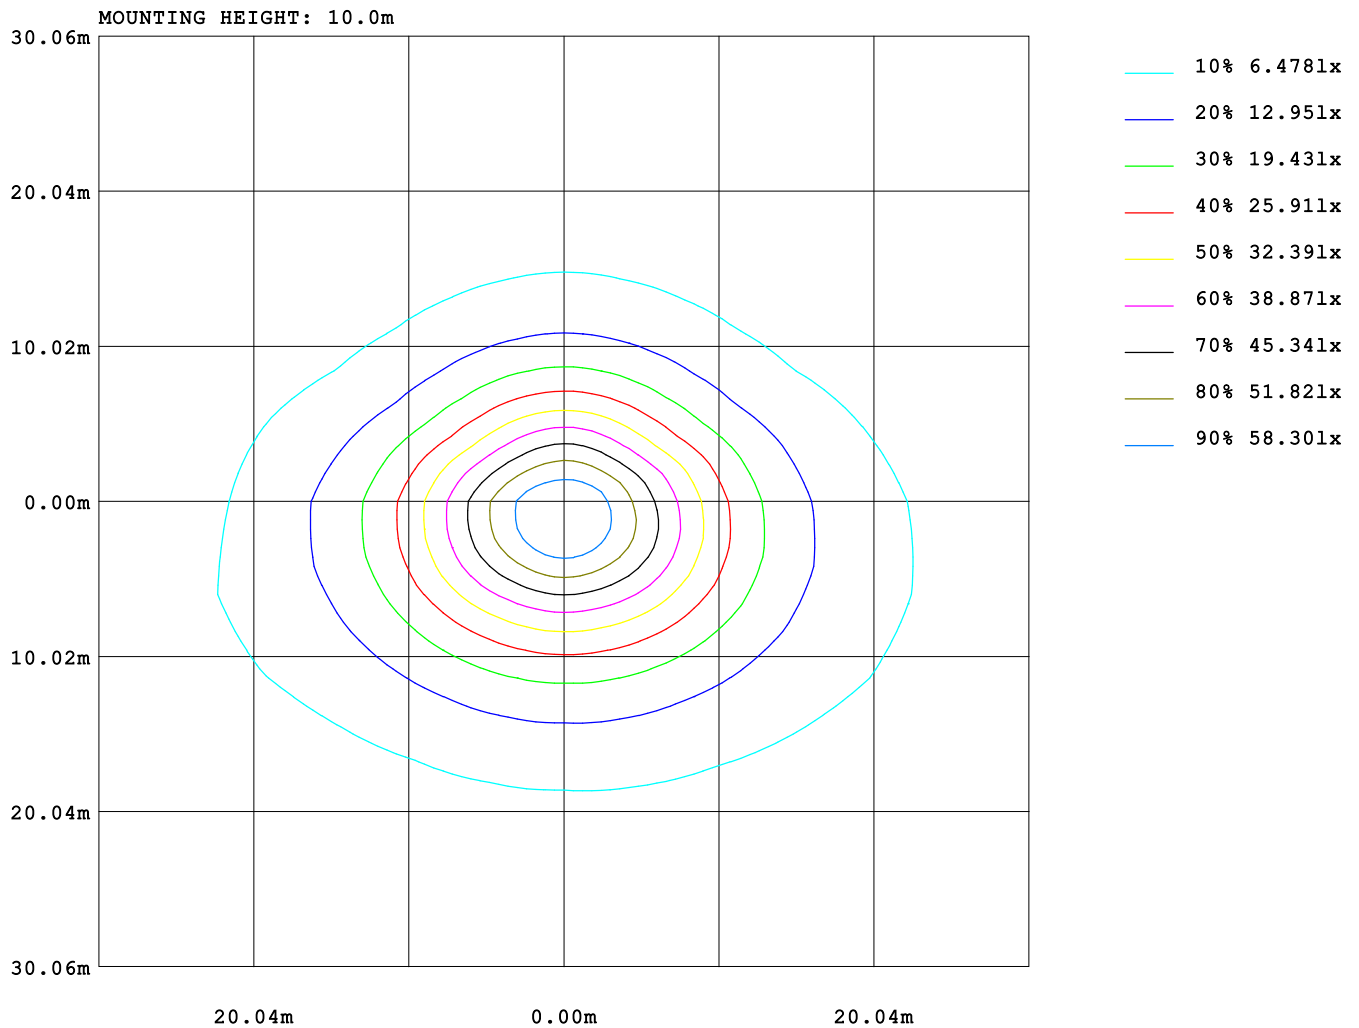

Test System:
Temperature:25.3DEG
Operators:
Test Date:2025.03.23

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:10.000 m
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

| | | |
|---|--------------------------------|--------------------|
| MANUFACTURER: ILUMEN GMBH | Address: | |
| NAME: Muller | TYPE:IL-ST11-D20040-TY3 | WEIGHT: |
| SPECIFICATION:5050LED 4000K Type III | DIMENSION: | SERIAL No.: |

UNIT: ×10cd

| C (DEG) γ (DEG) | 0 | 15 | 30 | 45 | 60 | 75 | 90 | 105 | 120 | 135 | 150 | 165 | 180 | 195 | 210 |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 0.0 | 638 | 638 | 638 | 638 | 638 | 638 | 638 | 638 | 638 | 638 | 638 | 638 | 638 | 638 | 638 |
| 5.0 | 639 | 644 | 648 | 653 | 656 | 658 | 658 | 658 | 655 | 652 | 648 | 643 | 640 | 634 | 628 |
| 10.0 | 641 | 651 | 660 | 668 | 673 | 676 | 677 | 676 | 672 | 667 | 659 | 651 | 645 | 633 | 620 |
| 15.0 | 648 | 662 | 675 | 685 | 691 | 695 | 695 | 693 | 689 | 683 | 674 | 663 | 656 | 636 | 613 |
| 20.0 | 658 | 679 | 694 | 704 | 707 | 709 | 708 | 708 | 704 | 701 | 693 | 681 | 672 | 641 | 607 |
| 25.0 | 675 | 704 | 721 | 726 | 722 | 721 | 719 | 718 | 717 | 720 | 719 | 706 | 695 | 649 | 601 |
| 30.0 | 699 | 735 | 753 | 751 | 737 | 729 | 726 | 725 | 729 | 742 | 748 | 736 | 720 | 661 | 594 |
| 35.0 | 727 | 769 | 786 | 777 | 751 | 734 | 728 | 728 | 738 | 763 | 777 | 768 | 747 | 676 | 586 |
| 40.0 | 759 | 804 | 817 | 800 | 763 | 736 | 727 | 729 | 745 | 781 | 804 | 799 | 771 | 686 | 577 |
| 45.0 | 787 | 837 | 847 | 818 | 770 | 738 | 724 | 729 | 751 | 795 | 829 | 829 | 799 | 694 | 564 |
| 50.0 | 814 | 873 | 878 | 831 | 774 | 735 | 714 | 724 | 753 | 805 | 852 | 865 | 831 | 701 | 546 |
| 55.0 | 843 | 914 | 903 | 842 | 765 | 717 | 692 | 703 | 739 | 809 | 874 | 905 | 872 | 708 | 521 |
| 60.0 | 879 | 961 | 938 | 844 | 738 | 681 | 648 | 662 | 704 | 800 | 901 | 961 | 911 | 706 | 493 |
| 65.0 | 920 | 1024 | 982 | 831 | 671 | 577 | 536 | 542 | 606 | 757 | 940 | 1025 | 873 | 695 | 444 |
| 70.0 | 912 | 1037 | 1025 | 769 | 480 | 323 | 218 | 247 | 337 | 575 | 900 | 984 | 654 | 508 | 303 |
| 75.0 | 750 | 863 | 845 | 436 | 104 | 66.4 | 58.5 | 59.6 | 60.4 | 131 | 571 | 708 | 301 | 213 | 125 |
| 80.0 | 409 | 451 | 320 | 78.7 | 37.6 | 32.2 | 29.2 | 27.9 | 28.5 | 37.3 | 132 | 251 | 55.1 | 42.8 | 21.0 |
| 85.0 | 102 | 104 | 60.5 | 21.6 | 11.8 | 10.2 | 6.54 | 8.49 | 7.52 | 12.3 | 18.6 | 32.2 | 5.49 | 3.74 | 5.85 |
| 90.0 | 6.03 | 8.20 | 4.41 | 4.55 | 1.75 | 2.70 | 1.28 | 2.60 | 1.58 | 2.99 | 1.95 | 3.95 | 3.34 | 2.20 | 3.17 |
| 95.0 | 1.86 | 3.12 | 1.50 | 2.39 | 1.16 | 1.99 | 0.96 | 1.92 | 1.10 | 2.20 | 1.48 | 2.93 | 3.50 | 2.66 | 3.29 |
| 100.0 | 2.31 | 3.04 | 1.70 | 2.25 | 1.15 | 1.80 | 1.05 | 1.77 | 1.16 | 2.13 | 1.66 | 2.94 | 3.73 | 3.07 | 3.54 |
| 105.0 | 2.73 | 3.17 | 1.97 | 2.32 | 1.40 | 1.90 | 1.29 | 1.88 | 1.38 | 2.21 | 1.91 | 3.06 | 3.94 | 3.38 | 3.73 |
| 110.0 | 3.08 | 3.36 | 2.27 | 2.46 | 1.64 | 2.04 | 1.52 | 2.02 | 1.62 | 2.34 | 2.16 | 3.22 | 4.11 | 3.64 | 3.89 |
| 115.0 | 3.34 | 3.53 | 2.54 | 2.62 | 1.87 | 2.19 | 1.75 | 2.18 | 1.84 | 2.49 | 2.39 | 3.35 | 4.26 | 3.87 | 4.07 |
| 120.0 | 3.59 | 3.69 | 2.81 | 2.80 | 2.11 | 2.35 | 1.96 | 2.32 | 2.06 | 2.64 | 2.61 | 3.50 | 4.46 | 4.13 | 4.29 |
| 125.0 | 3.84 | 3.88 | 3.06 | 2.99 | 2.33 | 2.53 | 2.19 | 2.50 | 2.28 | 2.83 | 2.84 | 3.66 | 4.68 | 4.42 | 4.55 |
| 130.0 | 4.12 | 4.09 | 3.31 | 3.21 | 2.59 | 2.73 | 2.43 | 2.70 | 2.54 | 3.02 | 3.07 | 3.86 | 4.81 | 4.61 | 4.80 |
| 135.0 | 4.34 | 4.28 | 3.54 | 3.41 | 2.85 | 2.93 | 2.68 | 2.91 | 2.77 | 3.21 | 3.28 | 4.02 | 4.78 | 4.62 | 4.87 |
| 140.0 | 4.44 | 4.38 | 3.69 | 3.56 | 3.06 | 3.14 | 2.91 | 3.11 | 2.98 | 3.36 | 3.43 | 4.09 | 4.68 | 4.53 | 4.79 |
| 145.0 | 4.41 | 4.38 | 3.78 | 3.68 | 3.23 | 3.31 | 3.09 | 3.28 | 3.14 | 3.47 | 3.51 | 4.09 | 4.56 | 4.42 | 4.69 |
| 150.0 | 4.33 | 4.35 | 3.84 | 3.77 | 3.38 | 3.44 | 3.25 | 3.42 | 3.29 | 3.57 | 3.58 | 4.07 | 4.46 | 4.33 | 4.58 |
| 155.0 | 4.26 | 4.33 | 3.89 | 3.84 | 3.52 | 3.58 | 3.40 | 3.58 | 3.44 | 3.68 | 3.65 | 4.06 | 4.39 | 4.25 | 4.49 |
| 160.0 | 4.23 | 4.30 | 3.94 | 3.92 | 3.65 | 3.70 | 3.56 | 3.72 | 3.57 | 3.76 | 3.73 | 4.05 | 4.35 | 4.20 | 4.42 |
| 165.0 | 4.22 | 4.29 | 3.98 | 4.00 | 3.78 | 3.82 | 3.72 | 3.84 | 3.72 | 3.85 | 3.80 | 4.07 | 4.33 | 4.18 | 4.36 |
| 170.0 | 4.24 | 4.29 | 4.05 | 4.08 | 3.89 | 3.96 | 3.86 | 3.96 | 3.84 | 3.97 | 3.88 | 4.10 | 4.32 | 4.18 | 4.33 |
| 175.0 | 4.24 | 4.28 | 4.10 | 4.15 | 3.99 | 4.06 | 4.01 | 4.05 | 3.94 | 4.04 | 3.95 | 4.12 | 4.31 | 4.17 | 4.27 |
| 180.0 | 4.29 | 4.27 | 4.16 | 4.19 | 4.12 | 4.16 | 4.16 | 4.15 | 4.07 | 4.12 | 4.04 | 4.12 | 4.29 | 4.18 | 4.22 |

Test System:
Temperature:25.3DEG
Operators:
Test Date:2025.03.23

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:10.000 m
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

| | | |
|---|--------------------------------|--------------------|
| MANUFACTURER: ILUMEN GMBH | Address: | |
| NAME: Muller | TYPE:IL-ST11-D20040-TY3 | WEIGHT: |
| SPECIFICATION:5050LED 4000K Type III | DIMENSION: | SERIAL No.: |

UNIT: ×10cd

| C (DEG) γ (DEG) | 225 | 240 | 255 | 270 | 285 | 300 | 315 | 330 | 345 |
|--------------------|------|------|------|------|------|------|------|------|------|
| 0.0 | 638 | 638 | 638 | 638 | 638 | 638 | 638 | 638 | 638 |
| 5.0 | 623 | 619 | 618 | 617 | 618 | 620 | 624 | 629 | 634 |
| 10.0 | 609 | 601 | 597 | 595 | 597 | 601 | 609 | 620 | 633 |
| 15.0 | 595 | 583 | 576 | 575 | 578 | 584 | 595 | 612 | 634 |
| 20.0 | 580 | 564 | 557 | 556 | 559 | 565 | 580 | 605 | 639 |
| 25.0 | 565 | 546 | 537 | 535 | 538 | 547 | 565 | 599 | 646 |
| 30.0 | 551 | 528 | 514 | 510 | 515 | 528 | 550 | 592 | 657 |
| 35.0 | 534 | 506 | 487 | 483 | 488 | 505 | 534 | 585 | 673 |
| 40.0 | 515 | 481 | 461 | 458 | 463 | 481 | 517 | 578 | 687 |
| 45.0 | 493 | 456 | 435 | 433 | 437 | 457 | 497 | 568 | 696 |
| 50.0 | 466 | 427 | 407 | 405 | 408 | 429 | 472 | 552 | 700 |
| 55.0 | 432 | 394 | 377 | 377 | 379 | 397 | 440 | 528 | 703 |
| 60.0 | 393 | 358 | 339 | 340 | 342 | 363 | 403 | 498 | 700 |
| 65.0 | 337 | 304 | 285 | 290 | 291 | 314 | 353 | 468 | 696 |
| 70.0 | 220 | 169 | 156 | 162 | 166 | 213 | 260 | 349 | 600 |
| 75.0 | 83.9 | 71.9 | 44.7 | 49.6 | 50.3 | 94.1 | 119 | 164 | 314 |
| 80.0 | 15.7 | 13.2 | 5.61 | 6.67 | 6.69 | 13.8 | 35.3 | 42.1 | 84.9 |
| 85.0 | 3.10 | 3.85 | 0.95 | 1.96 | 0.88 | 3.97 | 5.21 | 9.02 | 6.93 |
| 90.0 | 1.66 | 2.26 | 1.06 | 1.89 | 1.04 | 2.25 | 1.49 | 3.18 | 2.21 |
| 95.0 | 2.08 | 2.44 | 1.42 | 2.06 | 1.40 | 2.39 | 1.93 | 3.16 | 2.41 |
| 100.0 | 2.50 | 2.71 | 1.83 | 2.32 | 1.82 | 2.68 | 2.40 | 3.43 | 2.85 |
| 105.0 | 2.83 | 2.99 | 2.22 | 2.65 | 2.23 | 3.01 | 2.79 | 3.65 | 3.19 |
| 110.0 | 3.14 | 3.26 | 2.60 | 2.95 | 2.61 | 3.30 | 3.13 | 3.84 | 3.44 |
| 115.0 | 3.40 | 3.48 | 2.93 | 3.24 | 2.97 | 3.55 | 3.44 | 4.04 | 3.67 |
| 120.0 | 3.64 | 3.68 | 3.20 | 3.50 | 3.27 | 3.79 | 3.71 | 4.25 | 3.89 |
| 125.0 | 3.91 | 3.93 | 3.47 | 3.74 | 3.54 | 4.01 | 3.96 | 4.47 | 4.15 |
| 130.0 | 4.20 | 4.19 | 3.78 | 3.98 | 3.81 | 4.23 | 4.20 | 4.73 | 4.42 |
| 135.0 | 4.41 | 4.42 | 4.07 | 4.27 | 4.08 | 4.47 | 4.42 | 4.86 | 4.52 |
| 140.0 | 4.45 | 4.56 | 4.31 | 4.48 | 4.30 | 4.61 | 4.50 | 4.82 | 4.49 |
| 145.0 | 4.42 | 4.58 | 4.41 | 4.57 | 4.39 | 4.64 | 4.47 | 4.71 | 4.40 |
| 150.0 | 4.37 | 4.56 | 4.43 | 4.57 | 4.40 | 4.60 | 4.40 | 4.60 | 4.31 |
| 155.0 | 4.32 | 4.51 | 4.42 | 4.56 | 4.38 | 4.56 | 4.35 | 4.50 | 4.24 |
| 160.0 | 4.28 | 4.47 | 4.39 | 4.55 | 4.36 | 4.50 | 4.29 | 4.42 | 4.17 |
| 165.0 | 4.25 | 4.42 | 4.34 | 4.50 | 4.31 | 4.43 | 4.25 | 4.35 | 4.14 |
| 170.0 | 4.22 | 4.35 | 4.27 | 4.45 | 4.26 | 4.37 | 4.19 | 4.29 | 4.11 |
| 175.0 | 4.16 | 4.26 | 4.17 | 4.33 | 4.15 | 4.25 | 4.11 | 4.20 | 4.05 |
| 180.0 | 4.13 | 4.17 | 4.09 | 4.21 | 4.09 | 4.14 | 4.04 | 4.12 | 4.03 |

Test System:
Temperature:25.3DEG
Operators:
Test Date:2025.03.23

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:10.000 m
Remarks: